

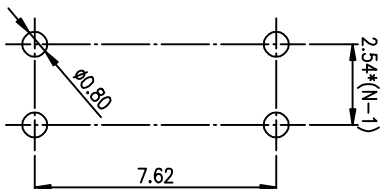
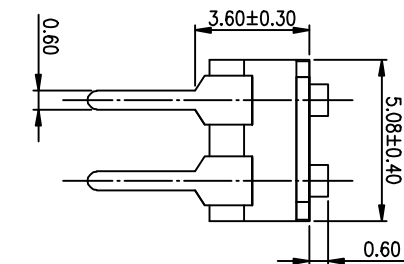
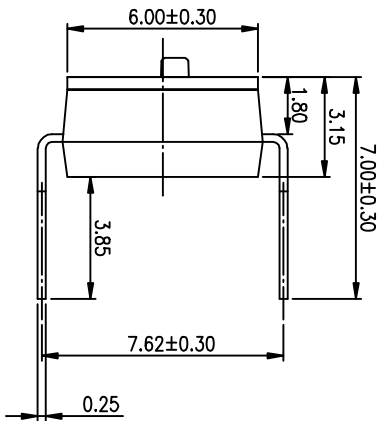


PRODUCT NO.	RoHS compliant
DISC02LHGET	

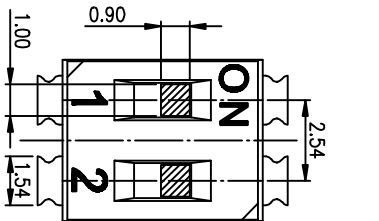

(Construction)



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION	
LINER	ANGLES	COPY	PROJECTION	
0 ± 0.25	0. ± 2°			
.00 ± 0.15	.0 ± 1°			
.000± 0.10	.00± 0.5°			
DESIGN	kathy	2012/04/12		
DRAWING				
CHECK				
APPRO.				
东莞市广富实业有限公司 Dongguan Kingtek Industrial Co., Ltd.				
TITLE				
BY DISC SERIES PITCH 2.54mm				
PRODUCT FAMILY DISC SERIES				
PRAT NO. DISC02LHGET				
FILE NO. DISC02LHGET-A				
SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	1 OF 1	A

NOTES :

1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4> Mechanical Life: 3000cycles minimum
- 5> Electrical Life: 2000cycles 25mA 24VDC

2. PLATING:

GOLD FLASH 1u"(min.) SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L H G E I
[包装方式: T=管装 R=盒装]
[电镀层: B=镀镍1u"~3u" 焊盘镀1~2u"]
[G=镀金 S=内金外镀]
[材质: S铜 / J铜 / 铝 / A铜 / Z铜]
[T=低温制程 S=低温制程 L=长推]
[产品规格: 01=1P 02=2P 03=3P 12=12P]

