
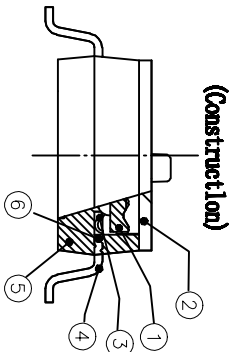
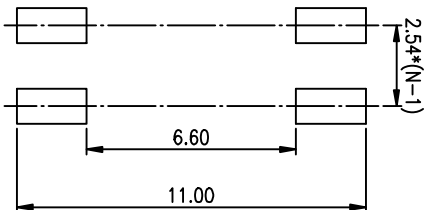

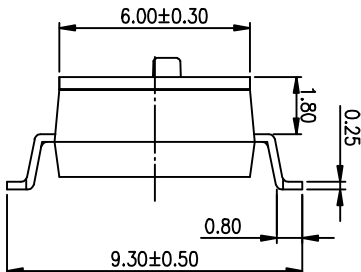


PRODUCT NO.	RoHS compliant
DISC02LSGET	

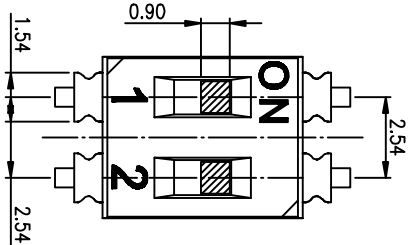

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1~3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED				INSPECTION	
LINER		ANGLES		COPY	
.0 ± 0.25		0. ± 2°		PROJECTION	
.00 ± 0.15		.0 ± 1°			
.000± 0.10		.00± 0.5°		2012/04/12	
DESIGN		kathy			
DRAWING					
CHECK					
APPRO.					
TITLE				东莞市广安实业有限公司 Dongguan Kingke Industrial Co., Ltd.	
BY DISC SERIES PITCH 2.54mm					
PRODUCT FAMILY DISC SERIES					
PRAT NO.				DISC02LSGET	
FILE NO.				DISC02LSGET-A	
SIZE		UNIT		SCALE SHEET REV.	
A4		mm		2 : 1 10F-1 A	

REV.	ECN NO.	DR	DATE

NOTES :

1.Specification:

- 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5>.Electrical Life:2000cycles minimum
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L S G E T

【包装方式: T=管装 B=盒装】
【电镀层: B=镀锡或1u"-3u" 焊锡部1~2u"】
【G=镀金 S=内金外镀】
【牌型: S牌 / J牌 / H牌 / A牌 / Z牌】
【T=低温贴片 S=低温不贴片 L=长推】
【产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】

