

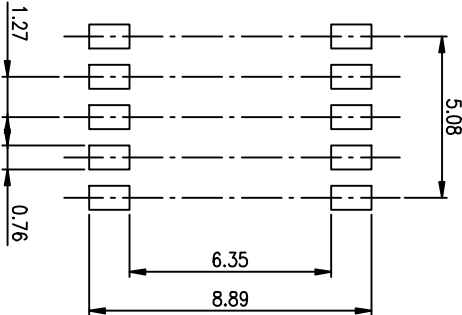
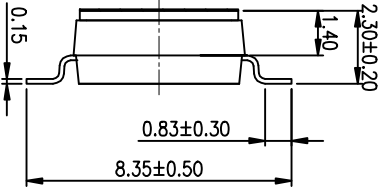


|             |                |
|-------------|----------------|
| PRODUCT NO. | RoHS compliant |
| DSHP05TSGER |                |

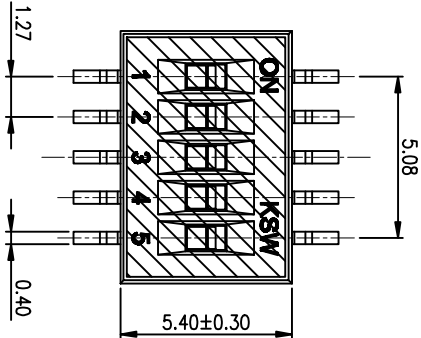

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

| Number | Part Name        | Material         | Finished   |
|--------|------------------|------------------|------------|
| ①      | Actuator         | UL94 V0          | White      |
| ②      | Cover            | UL94 V0          | Black      |
| ③      | Movable          | Beryllium Copper | 3μ Gold    |
| ④      | Terminal         | Brass            | 1μ Gold    |
| ⑤      | Base             | UL94 V0          | Black      |
| ⑥      | Terminal Contact | Brass            | 1μ~3μ Gold |
| ⑦      | Mylar            | UL94 V0          | 0.05mm     |

| TOLERANCE UNLESS OTHERWISE SPECIFIED |            |            | INSPECTION COPY             |  | 總督精密有限公司<br>KINGTEK INDUSTRIAL Co.,LTD |  |  |  |
|--------------------------------------|------------|------------|-----------------------------|--|----------------------------------------|--|--|--|
| LINER                                | ANGLES     | PROJECTION | BY DSHP SERIES PITCH 1.27mm |  | PRODUCT FAMILY DSHP SERIES             |  |  |  |
| 0 ± 0.25                             | 0 ± 2°     | 0 ± 0.10   | PRAT NO. DSHP05TSGER-A      |  | FILE NO. DSHP05TSGER-A                 |  |  |  |
| 0.00 ± 0.15                          | .0 ± 1°    | .00 ± 0.10 | DRAWING                     |  | SIZE UNIT SCALE SHEET REV.             |  |  |  |
| 0.00 ± 0.10                          | .00 ± 0.5° | .00 ± 0.10 | CHECK                       |  | A4 mm 2 : 1 10F-1 A                    |  |  |  |
| 0.00 ± 0.10                          | .00 ± 0.5° | .00 ± 0.10 | APPRO.                      |  |                                        |  |  |  |

NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life:1000cycles 25mA 24VDC
- 5>.Mechanical Life: 3000cycles Operations

2. PLATING:

GOLD FLASH 1u"~2u" SOLDER TAIL,  
1u"~3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION :

DSHP XX I S G E R

- [包装方式: T=管装 R=Reel]
- [电镀层: B=镀触部1u"~3u" 焊脚部1.2u" G=镀触部30u" 焊脚部30u" F=镀触部10u" 焊脚部10u"
- [G=镀全金 S=内镀金(接触部) 外镀锡(焊脚部) ]
- [脚型: S脚 / J脚 / I脚 / A脚 / Z脚]
- [T=低推贴胶 S=低推不贴胶 L=长推]
- [产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

