
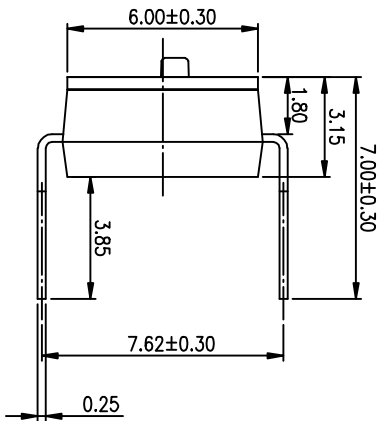





PRODUCT NO.	RoHS compliant
DISC05LHGET	

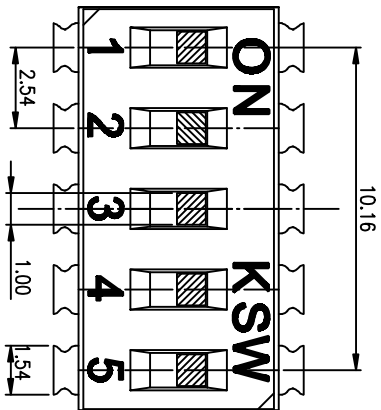

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
GOLD FLASH 1u"(min.) SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L H G E I
[包装方式: T=管装 R=盒装]
[电镀层: B=镀锡层 1u"~3u" 焊盘部 1~2u"]
[G=镀金 S=内金外镀]
[厚度: S=0.1mm / 0.1mm / 0.1mm / 0.1mm]
[T=低阻抗度 S=低阻抗度 T=长推]
[产品规格: 01=1P 02=2P 03=3P 12=12P]

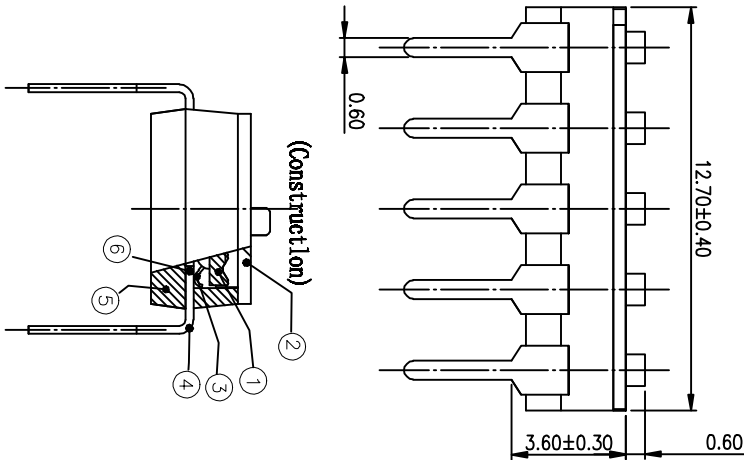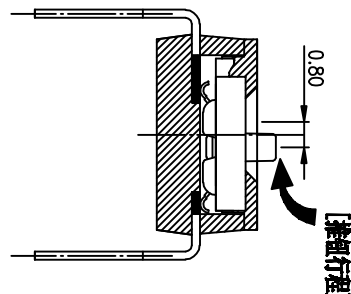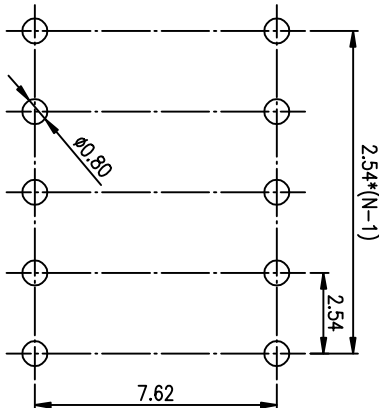

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	FILE NO.	SIZE	UNIT	SCALE	SHEET	REV.
①	Actuator	UL94 V0	White	0 ± 0.25	0. ± 2"	DISC05LHGET-A	A4	mm	2 : 1	1 OF 1	A
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1"	DISC05LHGET-A	A4	mm	2 : 1	1 OF 1	A
③	Movable	Copper Alloy	3u"Gold	.000± 0.10	.00± 0.5"	DISC05LHGET-A	A4	mm	2 : 1	1 OF 1	A
④	Terminal	Brass	1u"Gold	.000± 0.10	.00± 0.5"	DISC05LHGET-A	A4	mm	2 : 1	1 OF 1	A
⑤	Base	UL94 V0	Black	.000± 0.10	.00± 0.5"	DISC05LHGET-A	A4	mm	2 : 1	1 OF 1	A
⑥	Terminal Contact	Brass	1u"~3u"Gold	.000± 0.10	.00± 0.5"	DISC05LHGET-A	A4	mm	2 : 1	1 OF 1	A