
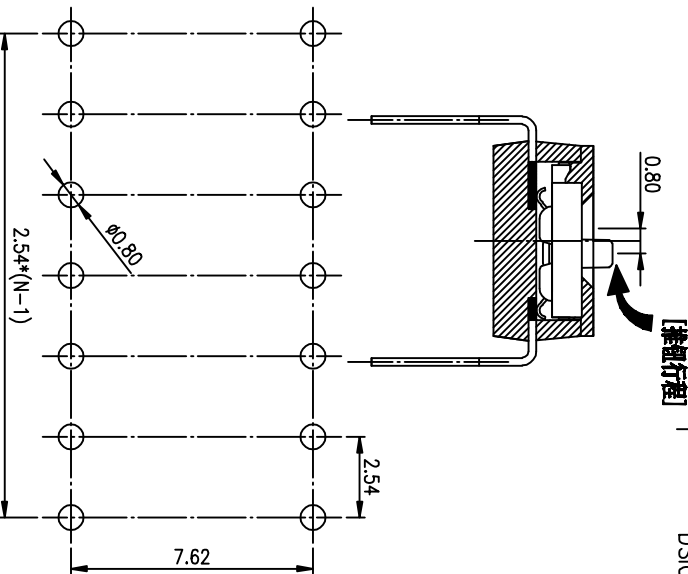
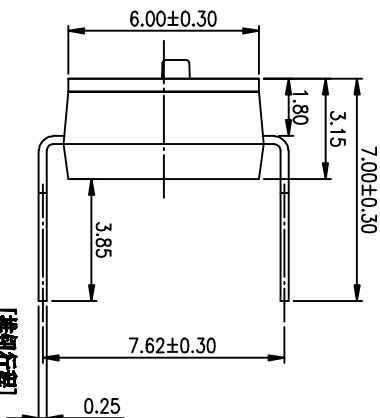

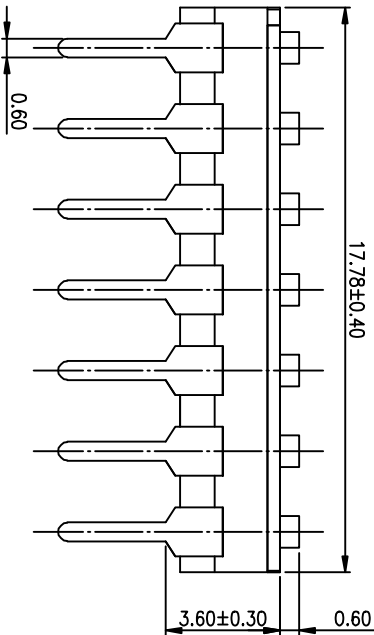


PRODUCT NO.	RoHS compliant
DISC07LHGET	

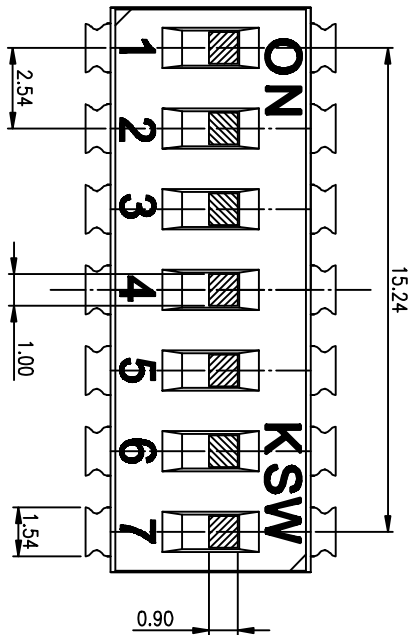

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED				INSPECTION	
LINER		ANGLES		COPY	
0 ± 0.25		0. ± 2°		PROJECTION	
.00 ± 0.15		.0 ± 1°		2012/04/12	
.000± 0.10		.00± 0.5°		DRAWING	
DESIGN		kathy		CHECK	
DRAWING				APPRO.	
FILE NO.		DISC07LHGET-A		SIZE	
UNIT		SCALE		SHEET	
REV.		1 OF 1		A	

NOTES :

- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL, 1u"~3u" GOLD PLATING ON THE CONTACT AREA, WITH 50u" NICKEL UNDERPLATING COVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L H G E I
[包装方式: T=管接 R=贴片]
[电镀层: B=镀锡 1u"~3u" 焊盘 1~2u"]
[G=镀金 S=内金外镀]
[材质: S=铜 / J=铜 / 玻璃 / A=铜 / Z=铜]
[T=低粘胶皮 S=低粘不粘皮 L=长推]
[产品代码: 01=1P 02=2P 03=3P 12=12P]

东莞市广通实业有限公司
Dongguan Kingtek Industrial Co., Ltd.