
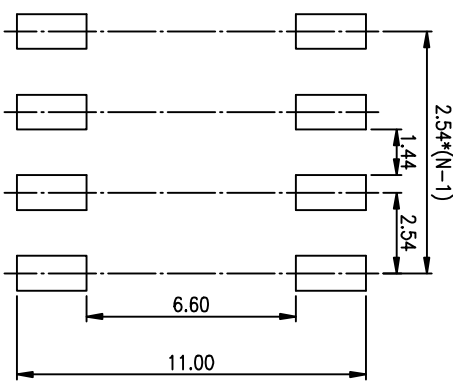
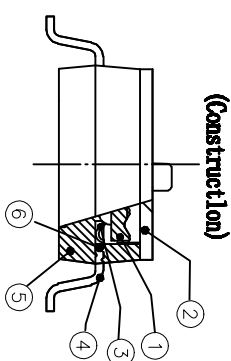
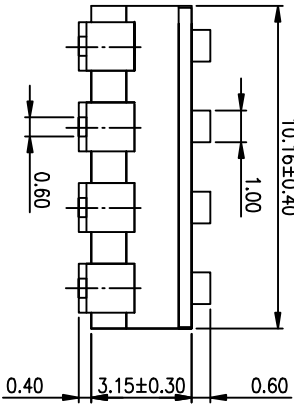
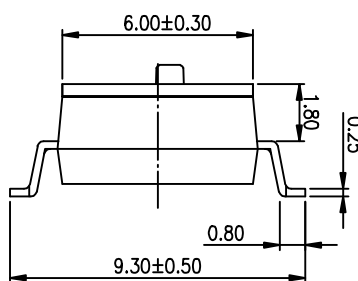


PRODUCT NO.	RoHS compliant
DISCO4LSGET	

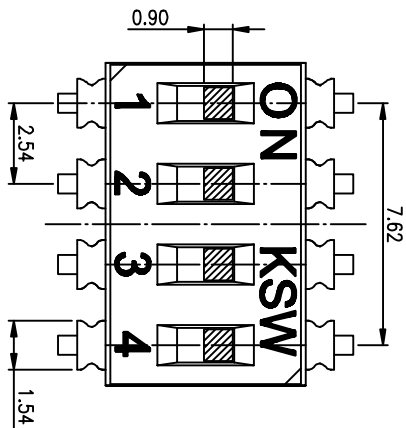


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1> Operation: 10000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles minimum
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L S G E T

【包装方式: T=管装 B=盒装】
【电镀层: B=镀锡或1u"-3u" 焊锡部1-2u"】
【G=鍍金 S=內金外鍍】
【牌型: S牌 / J牌 / I牌 / A牌 / Z牌】
【T=低溫貼板 S=低溫不貼板 L=長推】
【T=品P板: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1~3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	PROJECTION
LINER	0. ± 0.25	0. ± 2°
ANGLES	0. ± 1°	0. ± 1°
DESIGN	.000± 0.10	.00± 0.5°
DRAWING	2012/04/12	
CHECK		
APPRO.		

FILE NO.	SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	10F-1	A	

东莞市广誉实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

BY DISC SERIES PITCH 2.54mm

PRODUCT FAMILY DISC SERIES

PRAT NO. DISCO4LSGET