


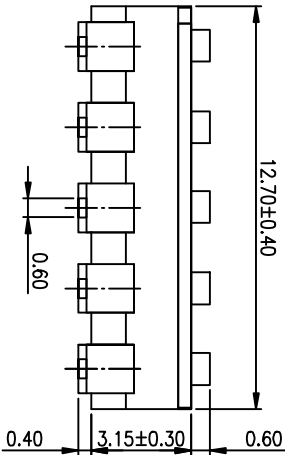
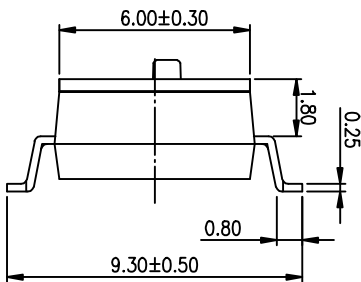


PRODUCT NO.	RoHS compliant
DISC05L SGET	

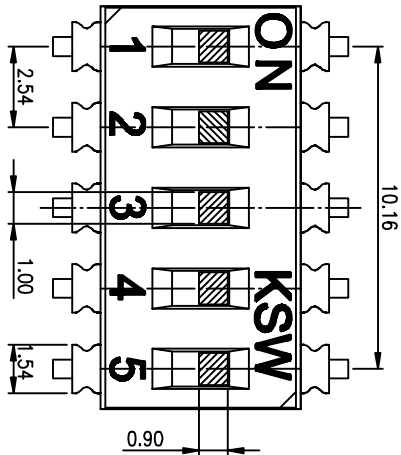


(Construction)

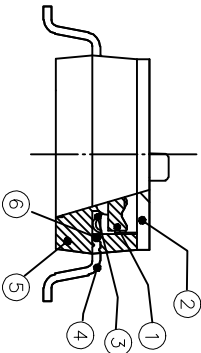

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1~3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED				INSPECTION COPY			
LINER		ANGLES		PROJECTION		TITLE	
0 ± 0.25		0. ± 2°		0.00 ± 0.15		BY DISC SERIES PITCH 2.54mm	
.00 ± 0.15		.0 ± 1°		.00 ± 0.10		PRODUCT FAMILY DISC SERIES	
.00 ± 0.10		.00 ± 0.5°		2012/04/12		PRAT NO.	
DESIGN		kathy		2012/04/12		DISC05L SGET	
DRAWING						FILE NO. DISC05L SGET-A	
CHECK						SIZE UNIT SCALE SHEET REV.	
APPRO.						A4 mm 2 : 1 1 OF 1 A	

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

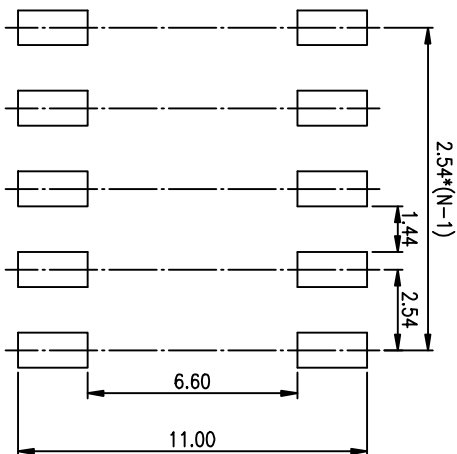

- NOTES :
- 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles minimum
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDER PLATING COVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L S G E T

[包裝方式: T=管裝 R=盒裝]

[電鍍層: B=鍍鎳或1u"-3u" 無鍍層1~2u"]

[G=鍍金 S=內金外鍍]

[牌型: S牌 / J牌 / I牌 / A牌 / Z牌]

[T=低溫貼裝 S=低溫不貼裝 L=長推]

J牌 品 牌 號 : 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P