



PRODUCT NO.	RoHS compliant
DSIC12L SSET	

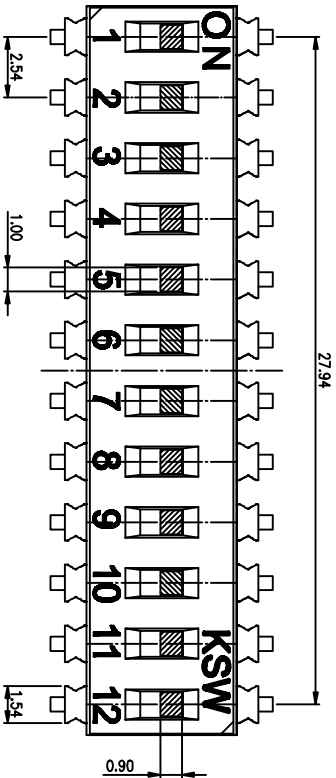

- NOTES :
- 1>.Specification:
- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:-40° to+85°
- 3>.Storage Temperature:-40° to+85°
- 4>.Mechanical Life:3000cycles minimum
- 5>.Electrical Life:2000cycles minimum
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDERTALL, 1u"~3u" GOLD PLATING ON THE CONTACT AREA, WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DSIC XX L S G E T

【包装方式: T=管装 R=Reel】



【电镀层: B=镀锡1u"~3u" 焊波锡1~2u"】

【G=鍍金 S=内金外镀】



【脚型: S脚 / J脚 / U脚 / A脚 / Z脚】

【T=低推贴胶 S=低推不贴胶 L=长推】

J"品号: 02-02P 04-02P 06-02P 08-02P 10-10P 12-12P

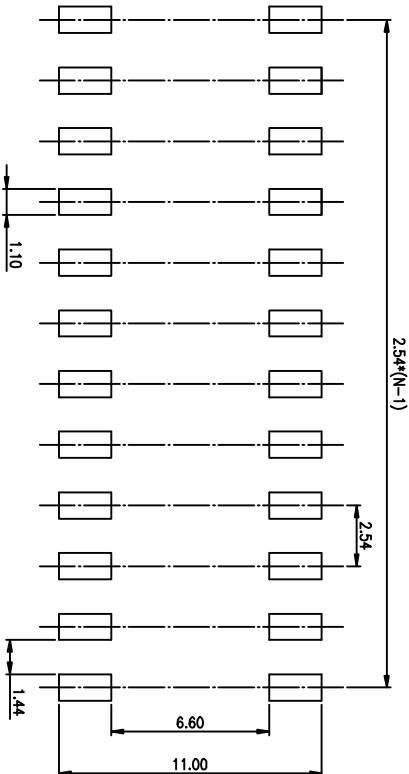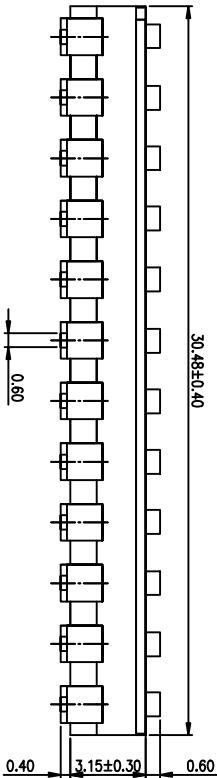

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



Number	Part Name	Material	Finished	INSPECTION	FILE NO.	UNIT	SCALE	SHEET	REV.
①	Actuator	UL94 V0	White	TOLERANCE UNLESS OTHERWISE SPECIFIED	BY DSIC SERIES PITCH 2.54mm	mm	2	1	A
②	Cover	UL94 V0	Black	OTHERWISE SPECIFIED	PRODUCT FAMILY DSIC SERIES	mm	2	1	A
③	Movable	Copper Alloy	3u"Gold	0 ± 0.25 0. ± 2°	PRAT NO.	mm	2	1	A
④	Terminal	Brass	1u"Gold	.00± 0.15 .0 ± 1°	FILE NO. DSIC12L SSET-A	mm	2	1	A
⑤	Base	UL94 V0	Black	.00± 0.10 .00± 0.5°	SIZE	mm	2	1	A
⑥	Terminal Contact	Brass	1~3u"Gold	DESIGN kathy 2012/04/12	UNIT SCALE	mm	2	1	A
				DRAWING	SHEET	mm	2	1	A
				CHECK	REV.	mm	2	1	A
				APPRO.		mm	2	1	A