
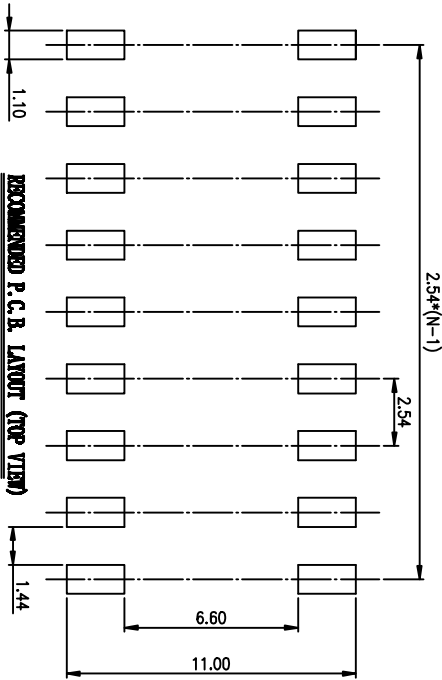


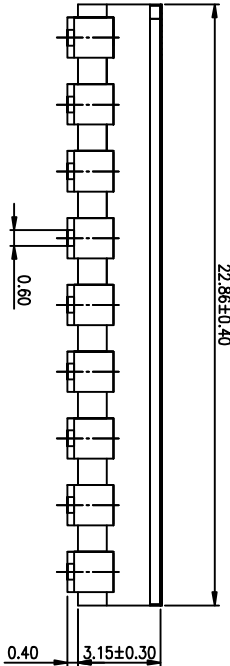



| PRODUCT NO.    | DS1C09TSGER |
|----------------|-------------|
| RoHS compliant |             |

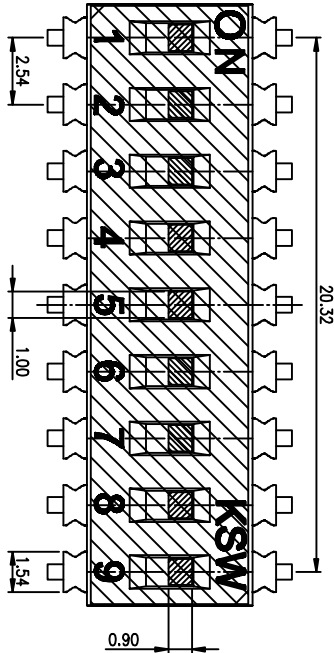

- NOTES :
- 1>.Operation force:1000gf Max
  - 2>.Operating Temperature: -40° to+85°
  - 3>.Storage Temperature: -40° to+85°
  - 4>.Mechanical Life:3000cycles minimum
  - 5>.Electrical Life:2000cycles 25mA 24VDC
2. PLATING:  
GOLD FLASH 1u"(min.) SOLDER TAIL,  
1~3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGCOVERALL.

### 3. PART NUMBER DESCRIPTION

DSIC XX I S G E R

【包装方式: T=管装 R=盒装】  
【电性能: B=接触部 1~3u" 焊盘部 1~2u"】  
【G=鍍金 S=内金(外鍍)】  
【脚型: S脚 / J脚 / 直脚 / A脚 / Z脚】  
【T=低润胶皮 S=低润不粘皮 L=长排】  
【产品数量: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】

### RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

| Number | Part Name        | Material     | Finished  | TOLERANCE UNLESS OTHERWISE SPECIFIED | INSPECTION COPY        | TITLE                       |
|--------|------------------|--------------|-----------|--------------------------------------|------------------------|-----------------------------|
| ①      | Actuator         | UL94 VO      | White     | LINER 0 ± 0.25 ANGLES 0. ± 2°        | PROJECTION             | BY DSIC SERIES PITCH 2.54mm |
| ②      | Cover            | UL94 VO      | Black     | .00 ± 0.15 .0 ± 1°                   | DESIGN                 | PRODUCT FAMILY DSIC SERIES  |
| ③      | Movable          | Copper Alloy | 3u"Gold   | .000± 0.10 .00± 0.5°                 | DRAWING                | PRAT NO. DSIC09TSGER        |
| ④      | Terminal         | Brass        | 1u"Gold   | 2012/04/12                           | FILE NO. DSIC09TSGER-A | SIZE UNIT SCALE SHEET REV.  |
| ⑤      | Base             | UL94 VO      | Black     | CHECK                                | A4 mm                  | 2 : 1 10F 1 A               |
| ⑥      | Terminal Contact | Brass        | 1~3u"Gold | APPRO.                               |                        |                             |
| ⑦      | Myar             | UL94 VO      | 0.05mm    |                                      |                        |                             |

东莞市广誉实业有限公司  
Dongguan Kingtek Industrial Co., Ltd.